



IGEA BT

ELECTROMECHANICAL OPERATOR FOR SWING GATES



COMPATIBLE

• **A MODEL FOR EVERY NEED.**

→ Great versatility thanks to the levers that permit installation on large sized pillars, opening up to 125°. Maximum offset 12" (30 cm)

• **SMART TECHNOLOGY.**

→ Control unit compatible with the EELink protocol.

• **SAFE USE.**

→ This version powered at 24V is specially designed for simpler and faster installation in compliance with latest safety standards.

→ Thanks to the antisquashing system, the operator reverses motion and prevents damage to people and vehicles in the event of contact.

• **SIMPLER INSTALLATION.**

→ BFT's system of coded limit switches makes it possible to reduce the complexity of wiring the low-voltage motors: a single wire is carried to the control panel instead of the three or five normally required, thereby increasing the simplicity and speed of installation. Furthermore, the system is able to automatically distinguish between the open limit switch and the closed one and hence prevent wasted time and wiring errors.



REFERENCE	DESCRIPTION	VOLTAGE	LEAF WEIGHT	LEAF LENGTH
P935070 00002	IGEA BT	24 V	up to 550 lbs (~250 kg)	up to 10' (3 m)
R935229 00004	IGEA BT KIT 2 OPERATORS	24 V	up to 550 lbs (~250 kg)	up to 10' (3 m)
R935229 00003	IGEA BT KIT 1 OPERATOR	24 V	up to 550 lbs (~250 kg)	up to 10' (3 m)

TECHNICAL FEATURES

	IGEA BT
CONTROL PANEL	LIBRA UL R
REVERSIBLE/IRREVERSIBLE OPERATOR	irreversible
POWER SUPPLY	120 V 60 Hz single-phase
ABSORBED POWER	0.05 hp (40 W)
THERMAL PROTECTION	integrated in the control panel
OPENING OR CLOSING TIME	15 s
IMPACT REACTION	torque limiter integrated in the control panel
TYPE OF LOCK	mechanical opening/closing
MANUAL RELEASE	release knob with personalised key
OPERATING CYCLE	intensive use
ENVIRONMENTAL CONDITIONS	from 5°F (-15°C) to 140°F (+60°C)
DEGREE OF PROTECTION	IP44
OPERATOR WEIGHT	35 lbs (~16 kg)
DIMENSIONS	see drawing next page
FUSE VALUE LIBRA BOARD TRANSFORMER	2A T
FUSE VALUE LIBRA BOARD LOGIC BOARD	1A T



DIMENSIONS

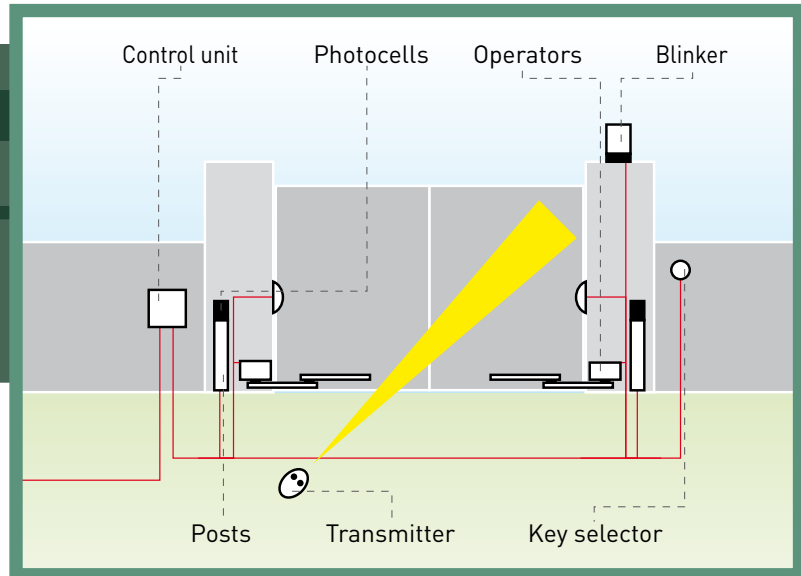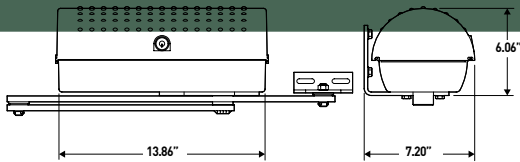

ACCESSORIES



D113701 00001 - LIBRA UL R

• Universal control panel for one or two 24V motors with 1 wire limit switch for each motor. • Quick wiring through plug-in terminal strips. • LCD display for quick programming and easy fault diagnosis. • Crushing prevention by electronic torque self-adjustment. • Built-in 63 remotes rolling code receiver. • Optional serial control management, solenoid electric lock and battery backup.



P125005 - BT BAT

24 Vdc battery backup system for PHOBOS BT, PHOBOS BT L, IGEA BT it includes a charger board that activates the batteries when power is off and charges the batteries when power is on.



KELIBRC002U - LIBRA 14 X 16 PRE-WIRED ENCLOSURE

Pre-wired 14 x 16 enclosure box with Libra UL/CSA and 2 -9Amp/h batteries for back-up



D111761 - ME BT

12/24 Vac electric lock interface for ECB locks with BT operators.



D121017 - ECB SX

Left-hand horizontal electric lock. Also available in right-hand and vertical versions.



N574005 - SIBOX

Empty safe for external release and control push-button panel. Dimensions: 7'x5'x3' 1/2.



N733036 - MOX

External release mechanism for Sibox



D531548 - KI

Blank spare key for release Knob



D111665 00003 - LIBRA UL R BOARD ONLY

Replacement board.



KELIBRC005U - ECOSOL LIBRA PRE-WIRED ENCLOSURE KIT

Libra UL/CSA 24V control board with ECOSOL interface, 2 - 9Amp/H batteries and radio receiver inside a pre-wired 12" x 14" box. Kit contains 10W solar panel and 15' of panel cable.



N999177 - PARTS KIT

Kit for Joint/Igea arms



D731121 JOINT/IGEA PRIMARY ARM

Grey powder coated arm connecting to operator.



D731120 JOINT/IGEA SECONDARY ARM

Grey powder coated arm connecting to the gate bracket.

Dhonaadhi
Hitec Innovations

Old No.16, New No.12, First Floor,
(Opp to Vijayanagar Ayyappan Saba)
Ramnagar 2nd Street, Velachery,
Chennai - 600 042.
☎ 044 - 399 22 645
www.dhonaadhi.in