

Elegance And Comfort Combined with Style !

- Sandal resistant aluminum extruded sleek design for door camera.
- Sw Pin hole lens with discreet IR LED's for night vision.
- Surface mount embedding box with sun shield for door camera.
- Monitor having Award winning Sleek Design of 2011, dimension of (120x180x25)mm.
- Several sector 4" color TFT LCD with digital text display.
- Switch Science Science
- Click fit mounting bracket on monitor.
- Support.


Dhonaadhi

Hitec Innovations Plot No.196, Door No.21,

Murugu Nagar 4th

Street, Vijaya Nagar Velachery, Chennai - 42 **399 22 645**

M9E1BC





The package consists:

- 4 Falt TFT-LCD" Colour high resolution Video Phone.
- Built in auto switcher for 2 door cameras.
- Hands-free Communication.
- Wiring: 4-Wire (polarity).
- Installation-Surface Mount.
- Feather touch door un-lock button.
- Ambient temperature:-10'C-50'C.
- Dimensions (W x H x D):(120x180x23)mm.
- · Option of connections up-to Four parallel monitors.

→ M9C

- Aluminium Alloy Vandal Resistant.
- Screw-less Sleek Design.
- Water & dust proof Mount .
- Colour 420 HTV lines.
- Crystal clear hands-free two way communication.
- Camouflaged IR Illumination for Night Vision.
- Min. Illumination 0.5 Lux only.
- PIN HOLE Wide angle of view up-to 85°.
- Ambient Temp:-10° to 50°C.
- Installation-Surface Mount.
- Dimensions (W x H x D); (52x140x30)mm.



Traditional Highlighted By The Clean Lines!

- Sconomical, Traditional Design
- Sw Video Intercom, Surveillance And Remote Door Release.
- A Classic Product Suitable For Villas And Apartment Buildings.
- 👟 Easy To Install ,use And Maintain.









The package consists: M10C

- Aluminium Extruded Design
- Backlit Name Tag
- Colour 420 HTV lines, 1/3" Sony CCD
- Crystal clear hands-free two way communication
- IR Illumination for Night Vision
- Min. Illumination 0.5 Lux only
- Wide angle of view up-to 85°
- Ambient Temp:-10° to 50°C
- Installation Flush Mount
- Dimensions (W x H x D); (125x185x41)mm

→ F2C

- 3.5" Colour LCD high resolution monitor
- Built in auto switcher for 2 door cameras
- Communication-Handset
- Built in SMPS power supply
- Wiring: 4-Wire (polarity)
- Installation-Surface Mount
- Ambient temperature:-10'C-50'C
- Net weight:1.21kg
- Dimensions(W x H x D):(192x210x73)mm.
- Option of connections up-to Four parallel monitors





COLOUR VIDEO PHONE KIT M10CMSF5C-7



ALBE DE EL

The package consists:

M10CMSF5C-7

- 7" LCD Colour high resolution display
- Hands-free Communication
- Built in auto switcher for 2 door cameras
- Feather touch door un-lock button
- Built in SMPS Power Supply
- Wiring: 4-Wire (polarity)
- Ambient temperature:-10°C-50°C
- Surface Mount Installation
- Dimensions(W x H x D):(220x160x37.5)mm

M10CMS

- Aluminum Extruded Design
- Backlit Name Tag
- Colour 420 HTV lines.
- Crystal clear hands-free two way communication
- IR Illumination for Night Vision
- Min. Illumination 0.5 Lux only
- Wide angle of view up-to 85°
- Ambient Temp:-10° to 50°C
- Installation Flush Mount
- Dimensions (W x H x D); (125x185x41)mm

More Than Just An Exercise In Style It Is The Pinnacle In Design!

- S A Classic Product Suitable For Villas And Apartments.
- Surveillance And Remote Door Release.
- Sesthetically Designed 7" Hands-free Video Phone Monitor.
- Elegant, Yet Cost-effective Combination.
- Easy To Install ,use And Maintain.
- Option Of Connections Up-to Four Parallel Monitors & Two Door Cameras.







The package consists:

→ VDPM80

- 4" Black & White CRT monitor
- Built in SMPS power supply
- Communication-Handset
- Wiring: 4-Wire (polarity)
- Installation-Surface Mount
- Ambient temperature:-10'C-50'C
- Net weight: 1.21kg
- Dimensions (W x H x D):(195x220x55)mm
- Option of connections up-to Four parallel monitors

VDPEC1

- Brushed Stainless Steel Finish
- Sleek & Elegant Water Proof Design
- 1/3"CCD, 420 HTV Lines-Black & White
- Wide angle of view up-to 85°
- IR Illumination for Night Vision
- Min.Illuminance 0.5 Lux
- Installation Flush Mount
- Ambient Temp:-10° to 50°C
- Net weight: 0.40Kg
- Dimensions (W x H x D); (94x170x50) mm

Traditional Highlighted By The Clean Lines!

- Several Action Contemporal Con
- Surveillance And Remote Door Release.
- San A Classic Product Suitable For Villas And Apartment Buildings.
- Salar Constall ,use And Maintain.





Simplicity Or Elegance ? A Dilemma!

- Simple, Yet Elegant Design.
- Surveillance And Remote Door Release.
- A Classic Product Suitable For Villas And Apartment.
- Easy To Install ,use And Maintain.

→ M4CMS

M4CMS

- Surface mount plastic design.
- Feather touch call button.
- Colour 1/4" CMOS CCD camera.
- Crystal clear hands-free two way communication.
- IR Illumination for night vision.
- Min. Illumination 0.5 Lux only.
- Wide angle of view up-to 85°.
- Ambient Temp:-10° to 50°C.
- Dimensions (W x H x D); (97x142x51)mm.







Simplicity Or Elegance ? A Dilemma!

- Simple, Yet Elegant Design.
- Surveillance And Remote Door Release.
- Solution A Classic Product Suitable For Villas And Apartment.
- Say To Install ,use And Maintain.

→ M7CMS

- Flush mount plastic design.
- Back Lit call button.
- Colour 1/3" HDIS 600 TVL with 3.7mm Pin Hole Lens.
- Crystal clear hands-free two way communication.
- IR Illumination for night vision.
- Min. Illumination 0.5 Lux only.
- Wide angle of view up-to 70°.
- Ambient Temp:-10° to 50°C.
- Dimensions (W x H x D) : (70x155x17)mm.
- Dimensions embedding box (W x H x D) : (65x140x44)mm.









Vandal Resistant & Tough, Yet Easy To Handle!

د» Simple, Yet Elega

06

- Surveillance And Remote Door Release
- Same A Classic Product Suitable For Villas And Apartm
- Sasy To Install, Use And Maintain.

→ M9C

- Aluminium Alloy Vandal Resistant.
- Screw-less Sleek Design.
- Water & dust proof Mount .
- Colour 420 HTV lines, 1/3" Sony CCD.
- Crystal clear hands-free two way communication.
- Camouflaged IR Illumination for Night Vision.
- Min. Illumination 0.5 Lux only.
- PIN HOLE Wide angle of view up-to 85°.
- Ambient Temp:-10° to 50°C.
- Installation Flush Mount.
- Dimensions (W x H x D); (52x140x30)mm.



OT


COLOR VIDEO PHONE KIT



Elegance And Comfort Combined with Style !

- Sw Vandal resistant aluminum extruded sleek design for door camera.
- Pin hole lens with discreet IR LED's for night vision.
- Surface mount embedding box with sun shield for door camera.
- Sign of 2011, dimension of (120x180x25)mm.
- Same and the second sec
- Switch Switches Construction Switches Construction Constr
- Since the second second
- Since where a support.



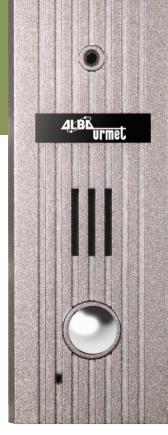

The package consists:

- 4 Falt TFT-LCD" Colour high resolution Video Phone.
- Built in auto switcher for 2 door cameras.
- Hands-free Communication.
- Wiring: 4-Wire (polarity).
- Installation-Surface Mount.
- Feather touch door un-lock button.
- Ambient temperature:-10'C-50'C.
- Dimensions (W x H x D):(120x180x23)mm.
- Option of connections up-to Four parallel monitors.

→ M9C

- Aluminium Alloy Vandal Resistant.
- Screw-less Sleek Design.
- Water & dust proof Mount .
- Colour 420 HTV lines.
- Crystal clear hands-free two way communication.
- Camouflaged IR Illumination for Night Vision.
- Min. Illumination 0.5 Lux only.
- PIN HOLE Wide angle of view up-to 85°.
- Ambient Temp:-10° to 50°C.
- Installation-Surface Mount.
- Dimensions (W x H x D); (52x140x30)mm.

M9E1BC



When and where it is needed. In one word "Compatible"!

- Simple, Yet Elegant Design.
- Service A Classic Product Suitable For Villas And Apartment.
- Sew Easy To Install ,use And Maintain
- Search Aluminium Extruded Design.
- Sacklit Name Tag
- Sony Colour 420 Htv Lines, 1/3" Sony Ccd.
- Scrystal Clear Hands-free Two Way Communication.
- Signal Strate St
- Solution Min. Illumination 0.5 Lux Only.
- ھ» Wide Angle Of View Up-to 85°
- **≤**» Ambient Temp:-10° To 50°c.
- د» Installation Flush Mount

M10C

Dimensions (W x H x D); (125x185x41)mm.



M10-25/8C Dimensions (W x H x D); (125x250x70.50)mm.

M10-25/4C

Dimensions (W x H x D); (125x250x70.50)mm.

M10-K8 Dimensions (W x H x D); (125x250x70.50)mm.

M10-K16 Dimensions (W x H x D); (125x250x70.50)mm.

COLOURED VIDEO DOOR PHONE KIT



Traditional Highlighted By The Clean Lines

- Sweet Sconomical, Traditional Design.
- Surveillance And Remote
- Several A Classic Product Suitable For Villas And A
- Sasy To Install ,use And Maintain.



The package consists:

→ F1-C

- 3.5" Colour LCD monitor
- Built in SMPS power supply
- Communication-Handset
- Wiring: 4-Wire (polarity)
- Installation-Surface Mount
- Ambient temperature:-10'C-50'C
- Net weight: 1.21kg
- Dimensions (W x H x D):(195x220x55)mm
- Option of connections up-to Four parallel monitc

CLVDPEC1

- Brushed Stainless Steel Finish
- Sleek & Elegant Water Proof Design
- 420 HTV Lines-Colour Camera
- Wide angle of view
- IR Illumination for Night Vision
- Min.Illuminance 0.5 Lux
- Installation Flush Mount
- Ambient Temp:-10° to 50°C
- Net weight: 0.40Kg
- Dimensions (W x H x D); (94x170x50) mm





Elegance, Comfort & Technology at your fingertips!

- Sea High Resolution 7" LCD Display panel with MEMORY.
- Surveillance And Remote Door Release
- Service A Classic Product Suitable For Villas And Apartment Buildings.
 - Sasy To Install ,use And Maintain


∂E81C

- Handsfree Communication, High Resolution 7" LCD display.
- Video Memory Stores 3 Video Image per call having total 60 images in 20 groups.
- Additional manual snap shot feature to store up-to 50 images.
- Date and time stamp feature with OSD menu.
- Induction SOFT TOUCH key buttons.
- Self insertion feature.
- Built-in auto switcher for 2 door cameras.
- Option of connections up-to four parallel monitors.
- Wiring: 4 wire (polarity).
- Requires 13.5 Vdc / 1.5 amp power supply.
- Surface Mount Installation.
- Ambient temperature :-10'C 50'C.


: 044 - 399 22 645

- Net Weight : 0.75 kg.
- Sleek Dimensions :



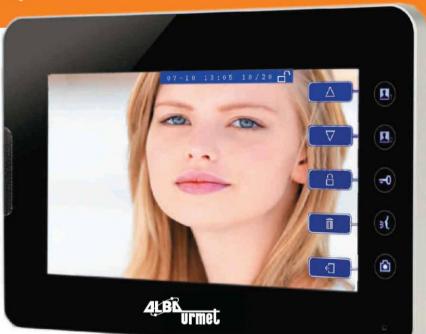

Function Keys :



Monitor Key 1 / Function Key Monitor Key 2 / Function Key Open Key / Function Key Talk Key / Function Key Snap Key / Function Key Microphone Talk Volume Control Knob Screen Speaker Down Key Menu Key

12 Up Key

1

2

3

4

5

6

7

8

9

10

11



EL2020 **Electronic Door Lock**



FUNCTION

Operation mode - Electronic, Latchkey or Manually

Good Security and protection operates like any normal night latch with excellent release mechanism. It's suitable for all sorts of door entry system - door phone, video phone and access control system.

Suitable for flush mounted single leaf or double leaf inward/outward opening doors.

SPECIFICATION

Normal Voltage
Work current
Consumption power
Electronic status
Operation time
Current draw
Pressure in normal
Temperature range


- 12-24VDC/AC
- 1.5-3A 10W
- requires power to open only 0.5 seconds at 12V
- 0.27A at 12VDC
- 10000N
- -40°C-+50°C



EL2020/IN- inside opening EL2020/OT - outside opening

ASIA Urmel



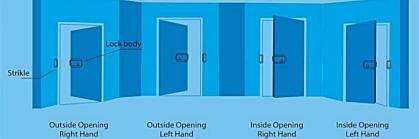





F2C

Traditional Highlighted By The Clean Lines!

- Several A Classic Product Suitable For Villas And Apartment Buildings.
- San Highly Cost-effective Combination.
- Sasy To Install ,use And Maintain.
- Surveillance And Remote Door Release.





- 3.5" Colour LCD high resolution monitor
- Built in auto switcher for 2 door cameras
- Communication-Handset
- Built in SMPS power supply
- Wiring: 4-Wire (polarity)
- Installation-Surface Mount
- Ambient temperature:-10'C-50'C
- Net weight:1.21kg
- Dimensions(W x H x D):(192x210x73)mm
- Option of connections up-to Four parallel monitors

⊙ <mark>F2</mark>

- 4" Black & White high resolution CRT monitor
- Built in auto switcher for 2 door cameras
- Communication-Handset
- Built in SMPS power supply
- Wiring: 4-Wire (polarity)
- Installation-Surface Mount
- Ambient temperature:-10'C-50'C
- Net weight:1.21kg
- Dimensions(W x H x D):(192x210x73)mm
- Option of connections up-to Four parallel monitors





Traditional Highlighted By The Clean Lines!

- F3C
- Sconomical, Traditional Design.
- Surveillance And Remote Door Release.
- Service A Classic Product Suitable For Villas And Apartment Buildings.
- ⇐» Easy To Install ,use And Maintain.

→ F3C

- 3.5" Colour LCD high resolution monitor
- Built in auto switcher for 2 door cameras
- Hands-free Communication
- Requires 12vdc adaptor
- Wiring: 4-Wire (polarity)
- Installation-Surface Mount
- Ambient temperature:-10'C-50'C
- Net weight:1.21kg
- Dimensions(W x H x D):(192x209x48.8)mm
- Option of connections up-to Four parallel monitors

→ F3

- 4" Black & White high resolution CRT monitor
- Built in auto switcher for 2 door cameras
- Hands-free Communication
- Requires 12vdc adaptor
- Wiring: 4-Wire (polarity)
- Installation-Surface Mount
- Ambient temperature:-10'C-50'C
- Net weight:1.21kg
- Dimensions(W x H x D):(192x209x48.8)mm
- Option of connections up-to Four parallel monitors







1







More Than Just An Exercise In Style It Is The Pinnacle In Design!

4LBR

urmel.


1

П.

II1 II2 1



- Source A Classic Product Suitable For Villas And Apartments.
- Surveillance And Remote Door Release.
- Sesthetically Designed 7" Hands-free Video Phone Monitor.
- Elegant, Yet Cost-effective Combination.
- Easy To Install ,use And Maintain.
- Soption Of Connections Up-to Four Parallel Monitors.



- Hands-free Communication
- Built in auto switcher for 2 door cameras
- Feather touch door un-lock button
- Built in SMPS Power Supply
- Wiring: 4-Wire (polarity)
- Ambient temperature:-10°C-50°C
- Surface Mount Installation
- Dimensions(W x H x D):(220x160x37.5)mm

www.albaurmet.com info@albaurmet.com



Elegance And Comfort Combined!

- Sweet Sconomical, Traditional Design.
- Surveillance And Remote Door Release.
 - » A Classic Product Suitable For Villas And Apartment Buildings.
- د» Easy To Install ,use And Maintain.

- 4.2 Falt TFT-LCD" Colour high resolution.
- Built in auto switcher for 2 door cameras
- Hands-free Communication
- Wiring: 4-Wire (polarity)
- Installation-Surface Mount
- Feather touch door un-lock button
- Ambient temperature:-10'C-50'C
- Dimensions (W x H x D):(135x200x35)mm
- Option of connections up-to Four parallel monitors



😚 : 044 - 399 22 645





Elegance And Comfort Combined!

- Search Sconomical, Traditional Design.
- Surveillance And Remote Door Release.
- A Classic Product Suitable For Villas And Apartment Buildings.
- د» Easy To Install ,use And Maintain.

- Flat LCD Colour high resolution
 Video Door Phone Monitor.
- Built in auto switcher for 2 door cameras
- Hands-free Communication
- Wiring: 4-Wire (polarity)
- Installation-Surface Mount
- Feather touch door un-lock button
- Ambient temperature:-10'C-50'C
- Dimensions (W x H x D):(242x162x33.5)mm
- Option of connections up-to Four parallel monitors







Traditional Highlighted By The Clean Lines!

- Search and Antice And Apartment Buildings.
- Same and the set of th
- Sasy To Install ,use And Maintain.
- Surveillance And Remote Door Release.







The package consists:

- F2

- 4" Black & White high resolution CRT monitor.
- · Built in auto switcher for 2 doors
- Communication-Handset.
- Built in SMPS power supply.
- Wiring: 4-Wire (polarity)
- Installation-Surface Mount
- Ambient temperature:-10'C-50'C
- Net weight:1.21kg
- Dimensions(W x H x D):(192x210x73)mm.
- Option of connections up-to Four parallel monitors

VDPEC1

- Brushed Stainless Steel Finish.
- Sleek & Elegant Water Proof Design.
- 1/3"CCD, 420 HTV Lines-Black & White
- Wide angle of view up-to 85°.
- IR Illumination for Night Vision.
- Min.Illuminance 0.5 Lux
- Installation Flush Mount
- Ambient Temp:-10° to 50°C
- Net weight: 0.40Kg
- Dimensions (W x H x D); (94x170x50) mm.



Elegance And Comfort Combined!

- Sew Economical, Traditional Design
- Surveillance And Remote Door Release.
- Search and A Classic Product Suitable For Villas And Apartment Buildings.
- sasy To Install ,use And Maintain.







The package consists: • F7C

- 4.2 Falt TFT-LCD" Colour high resolution.
- · Built in auto switcher for 2 door cameras
- Hands-free Communication
- Wiring: 4-Wire (polarity)
- Installation-Surface Mount
- Feather touch door un-lock button
- Ambient temperature:-10'C-50'C
- Dimensions (W x H x D):(135x200x35)mm
- Option of connections up-to Four parallel monitors

→ M1C

- Anodized aluminum screw-less design
- Backlit call button
- Colour 420 HTV lines, 1/3" Sony CCD
- Crystal clear hands-free two way communication
- IR Illumination for Night Vision
- Min. Illumination 0.5 Lux only
- Wide angle of view up-to 85°
- Ambient Temp:-10° to 50°C
- Installation Flush Mount
- Dimensions (W x H x D); (105x172x35)mm